




Shown with TA-8 Steel Casing as example.

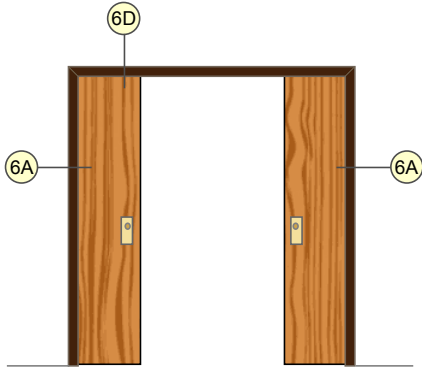

POCKET DOOR TRIM KIT - CONVERGING



6A Jamb - Pocket Door Trim



6D Header - Pocket Door Trim

RELATED INFORMATION

FRAME MATERIALS	DOOR SIZE AND OPENING WIDTH	JAMB DEPTH
Prefinished Steel	Max. Door Width: 2 x 5' - 0" Opening Width: (Door Width) - 1" Max. Door Height: 10' - 0"	Jamb Depths: 4" to 13" in 1/8" increments
DOOR THICKNESS		
1 3/4" only		
FRAME THICKNESS		
18 gauge		

ROUGH OPENING DIMENSIONS

WIDTH

The rough opening for pocket doors is actually created by the pocket frame system used. The Timely P series trim kit is designed to fit most common applications. Instead of recommending a rough opening size, we give guidelines that will accommodate standard sizes of trim kits.

Kit width is the nominal door widths less 1"


ROUGH OPENING RANGE: Minimum – Sum of Nominal Door widths plus 1/2"
 Maximum – Sum of Nominal Door widths plus 1"

HEIGHT

We provide our standard height frame which is 3/16" longer than the nominal door height. In most cases, a full height door panel is used since the top of the door is mounted above the header trim piece. The rough opening height is determined by the pocket frame and the door height can be adjusted or, if necessary, the door can be cut to clear flooring material

Timely Standard Height – 3/16" over nominal height

ROUGH OPENING: Determined by the pocket frame being used

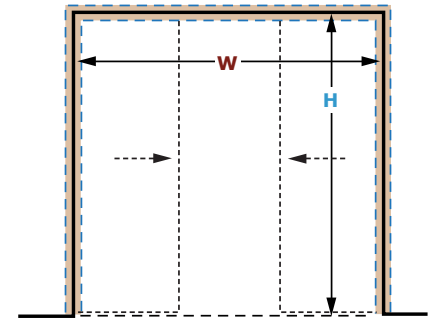

W range = Standard stop - door widths +1/2" to +1"

H = Determined by Pocket Door Hardware